

VP-LEH-123628M

- 1.支持五百万像素2/3"相机
- 2.有聚焦锁紧螺钉和光圈锁紧螺钉
- 3.低畸变成像
- 4.结构设计紧凑，光学性能优异




Pomeas五百万像素工业镜头

2/3"	5 Mega	MANUAL	C-mount	METAL
最大Sensor尺寸	五百万像素	手动光圈	C型接口	金属材料

VP-LEH-0816M五百万像素工业镜头参数表

型号	VP-LEH-123628M		
分辨率	500万像素; 160lp/mm(中心) 125lp/mm(周边)		
焦距	12-36mm		
光圈范围	F2.8-F16		
最大Sensor尺寸	2/3" (8.8mm X 6.6mm Ø11mm)		
视场角 (对角×水平×垂直)	2/3"	50.8° × 41.2° × 31.2° (wide)	17.2° × 13.8° × 10.4° (tele)
	1/2"	37.7° × 30.3° × 22.8° (wide)	12.6° × 10.1° × 7.6° (tele)
成像范围	0.15m-∞ (wide) 0.45m-∞ (tele)		
对象大小(在最近对焦距离处)	163.4mmX 130.7mmX98.0mm (wide) 152.0mmX 121.6mmX107.4mm (tele)		
操作方式	聚焦	手动(锁定机构)	
	光圈	手动(锁定机构)	
畸变率	2/3"	-3.4%@y=5.5mm (wide)	1.4%@y=5.5mm (tele)
	1/2"	-2.2%@y=4.0mm (wide)	0.9%@y=4.0mm (tele)
后焦距(in air)	18.93mm (wide) 18.87mm (tele)		
接口	C型		
滤镜尺寸	M40.5×0.5mm		
工作温度	-10℃~+50℃		
重量	188.0g		



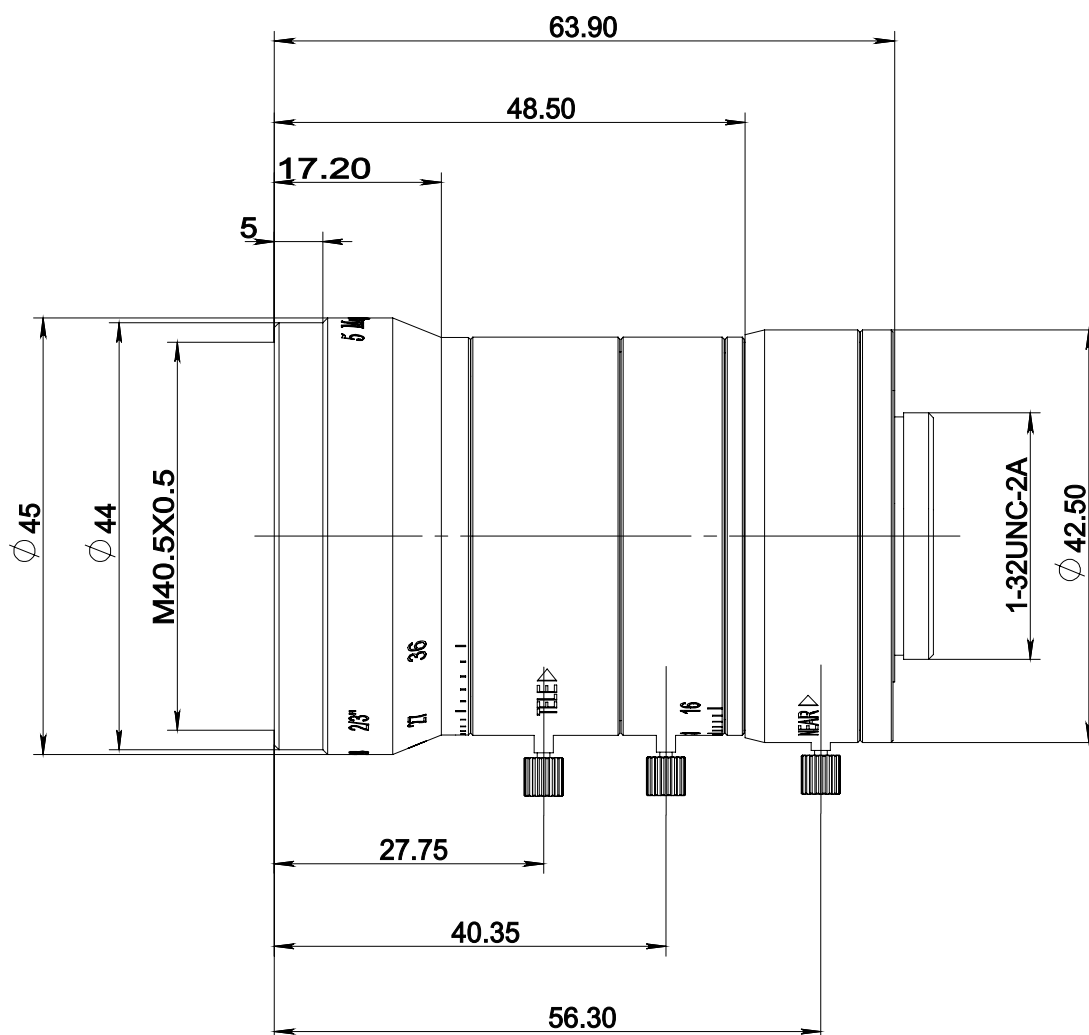

单位 mm	比例 1:1	型号	VP-LEH-123628M
视角 	 重量 0.158KG	名称	
		日期	2019/11/2
			POMEAS

